



# RiCOPTER

with *RIEGL* VUX<sup>®</sup>-SYS integrated



RIEGL VUX-1UAV features



The RiCOPTER is a high-performance unmanned multi-rotor aircraft equipped with *RIEGL*'s VUX-SYS sensor system to offer a fully integrated turnkey solution for professional UAS surveying missions.

The excellent measurement performance of the VUX-1UAV in combination with IMU/GNSS unit, antenna, control unit, and optional digital cameras results in survey grade measurement accuracy.

The RiCOPTER is a complete UAS LiDAR solution from one single manufacturer!



## RiCOPTER<sup>®</sup>

# Remotely Piloted Aircraft System for Unmanned Laser Scanning (ULS)

### Typical Applications

• Agriculture and Forestry • Topography in Open-Cast Mining • Terrain and Canyon Mapping • Surveying of Urban Environments • Archeology and Cultural Heritage Documentation • Construction-Site Monitoring • Corridor Mapping: Power Line, Railway Track, and Pipeline Inspection

[www.riegl.com](http://www.riegl.com)  
[www.ricopter.com](http://www.ricopter.com)



## RiCOPTER Main Features & Key Facts

- robust und reliable airborne scanner carrying platform
- full mechanical and electrical integration of sensor system components with aircraft fuselage
- carbon fibre main frame, foldable propeller carrier arms, and shock-absorbing undercarriage for stable flight, landings and comfortable transportation
- **NEW RiCOPTERControl (RiCC):**  
redundant flight control system developed and produced by *RIEGL*
- optimized for operation of VUX-SYS Sensor System including camera(s)
- remote control Graupner MC32 (2.4 GHz; telemetry supported)
- 433, 868 or 915 MHz command and control link;  
5.8 GHz live video downstream
- UN 38.3 certified batteries

## RiCOPTER Aircraft Technical Data

### Specifications and Performance:

<b>Main Dimensions</b> ready to fly arms folded for transportation & storage	1,920 mm x 1,820 mm x 470 mm 624 mm x 986 mm x 470 mm
<b>MTOM</b> (Maximum Take-Off Mass)	25 kg
<b>Max. Sensor Load</b>	up to 6.5 kg
<b>Empty Weight</b>	11 kg
<b>Max. tested and permitted Operating Altitude AMSL <sup>1)</sup></b>	up to 3000 m (10,000 ft) <sup>2) 3) 4)</sup> (under ISA <sup>5)</sup> conditions)
<b>Max. Flight Endurance</b>	up to 30 min <sup>6)</sup>
<b>Cruise Speed</b>	typ. 6 - 8 m/sec
<b>Take-off / Landing</b>	VTOL (Vertical Take-off and Landing)
<b>RiCOPTER Transportation Case</b> dimensions empty weight	1,220 mm x 810 mm x 540 mm approx. 20 kg
<b>RiCOPTER Ground Station</b> (optional) dimensions weight components	525 mm x 437 mm x 217 mm approx. 18.5 kg • monitor for video downstream • video receiver with two antennas • ground station PC (flight planning, mission guidance) • internal batteries for power supply

- 1) AMSL – Above Mean Sea Level  
2) depending on rotor blade configuration  
3) For flight altitude above ground level, operational limits for civil unmanned aircraft according to national regulations have to be observed.  
4) higher altitude possible with reduced performance  
5) ISA – International Standard Atmosphere  
6) with 6.5 kg sensor load

### Limitations:

<b>Max. Ground Speed</b>	14 m/sec <sup>1)</sup>
<b>Max. Tolerable Wind Speed</b>	8 m/sec
<b>Max. Climb Rate</b>	5 m/sec <sup>1)</sup>
<b>Max. Descent Rate</b>	2 m/sec <sup>1)</sup>

<sup>1)</sup> electronically limited

### Hot / Cold Weather Operation:

<b>Min. Operating Temperature</b>	-5°C OAT (Outside Air Temperature)
<b>Max. Operating Temperature</b>	+40°C OAT (Outside Air Temperature)



Remote Control Graupner MC32



easy to carry with  
integrated handle



RiCOPTER ready for take off




Transportation Case:  
foldable arms facilitate  
easy transportation and storage



## RiCOPTER Setup with Integrated *RIEGL VUX-SYS* Sensor System

The VUX-SYS fits the dedicated mounting bay of the RiCOPTER directly without any adaptations. The system is supplemented by two digital cameras, covering a field of view of approximately 160 degrees. The low weight of the VUX-SYS enables the RiCOPTER to operate up to half an hour at a gross weight of 25 kg.

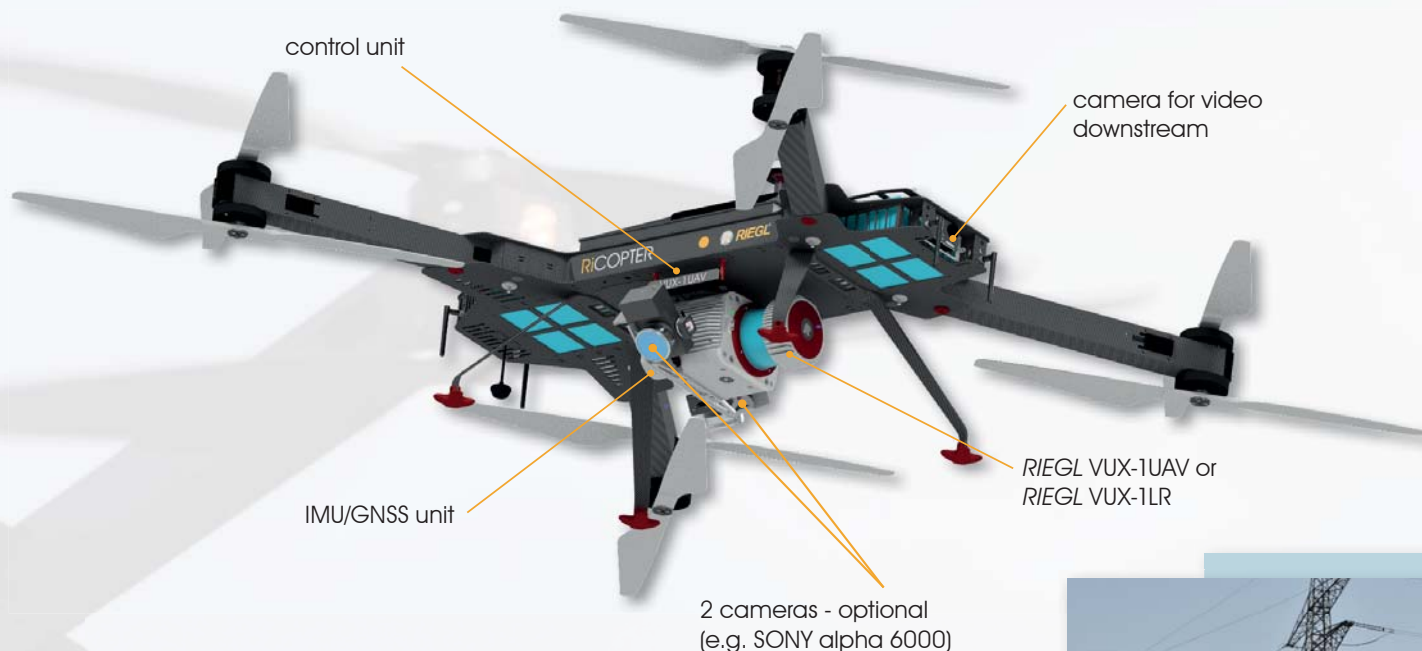

## RIEGL VUX-SYS Sensor System Technical Data

<b>System Components</b>	<ul style="list-style-type: none"> <li>• RIEGL VUX-1UAV</li> <li>• IMU/GNSS unit with antenna</li> <li>• control unit</li> <li>• up to 2 cameras (optional)</li> </ul>
<b>RIEGL VUX-1UAV Scanner Performance when integrated in RiCOPTER</b> Field of View (FOV) max. effective measurement rate max. range @ target reflectivity 20 % minimum range range accuracy Laser Safety Class according to IEC 60825-1:2014	230° up to 350,000 meas./sec 550 m 3 m 10 mm Laser Class 1 (eye safe)
<b>IMU/GNSS Unit</b> accuracy Roll, Pitch / Heading IMU sampling rate position accuracy (typ.)	0.015° / 0.035° 200 Hz 0.05 m - 0.3 m
<b>Camera Interfaces</b>	2x trigger and event marker

The VUX-SYS Sensor System can also be equipped with the *RIEGL VUX-1LR* (details on request).

Details to be found in the latest *RIEGL VUX-1UAV*, *VUX-1LR* & *VUX-SYS* data sheets.



RIEGL VUX-1UAV  
Data Sheet




RIEGL VUX-1LR  
Data Sheet



RIEGL VUX-SYS  
Data Sheet



power line mapping

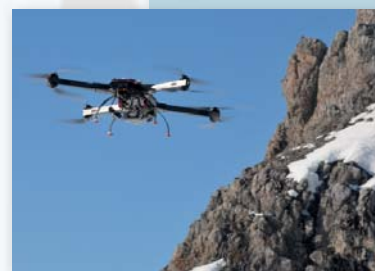

canyon mapping



open-cast mining

## RIEGL VUX-1 UAV Technical Data



max.  
measurement range



pulse repetition  
rate PRR (peak)



online waveform  
processing



optional  
digital camera



multiple  
target capability



eye safe operation  
at Laser Class 1



RIEGL VUX-1 UAV  
LiDAR Sensor

## Optional RiCOPTER Components / Accessories

### RiCOPTER Ground Station

The Ground Station comes in a PELI-Carrying-Case for easy and safe transportation and includes:

- monitor for receiving the video stream
- video receiver with 2 antennas
- mounting possibility for data link
- internal batteries for power supply
- Ground Station PC for flight planning and configuration of the mission (optional)



RiCOPTER  
Ground Station

### RiCOPTER Charging Control Unit

- professional PELI-Carrying-Case for easy and safe transportation
- equipped with all required connectors and cables
- Power Supply: 100 – 240 VAC / max. 1.200 Watt
- 2 charging slots for max. 10 A each (2 Charging Control Units are recommended)
- charging time: approx. 1 hour for 1 set (4 batteries; 2 Charging Control Units)

Further accessories available (more information on request).



RiCOPTER  
Charging Control Unit

## Further Information & Scan Data Projects

For receiving more information about the scope of delivery, pricing, and availability of sample data, please get in contact with [info@ricopter.com](mailto:info@ricopter.com).

Reference projects have already been carried out successfully in applications like power line & infrastructure mapping, forestry & agriculture, environmental monitoring, flood analysis, and many more.




Executive Summary  
Power Line Project



Executive Summary  
Environmental & Flood Analysis



Watch our videos!  
[youtube.com/rieglms](https://www.youtube.com/rieglms)

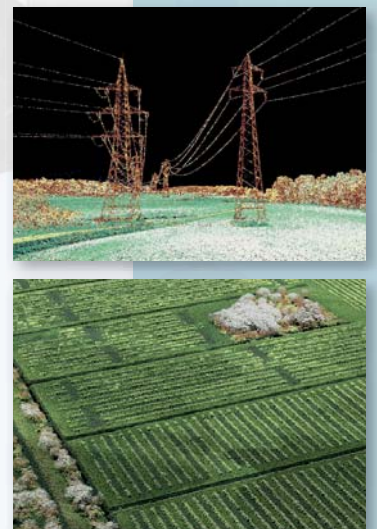

Scan Data Examples

The RiCOPTER is a high performance unmanned multi-rotor aircraft, designed & manufactured by RIEGL Laser Measurement Systems GmbH. It is distributed, supported and serviced by RiCOPTER UAV GmbH, also a RIEGL company.

Copyright RiCOPTER UAV GmbH © 2017 – All rights reserved.  
Use of this data sheet other than for personal purposes requires RiCOPTER UAV GmbH's written consent.  
This data sheet is compiled with care. However, errors cannot be fully excluded and alternations might be necessary.

[www.ricopter.com](http://www.ricopter.com)

**RiCOPTER**®  
... A RIEGL® COMPANY